


Sika Waterbar® FB-125

A New Solution for Construction Joint
Waterproofing of Basements



Sika Waterbar® FB-125
(674002), roll length 50 m,
width 125mm

ACCESSORIES

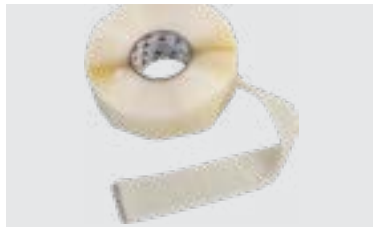

- SikaProof® Sandwich Tape (577412), adhesive strip for overlap jointing



- Sika Waterbar® FB Haltebügel (692357) mounting brackets to fix the Sika Waterbar® FB-125



- Fixing clamps (174374), for mechanical fixing/transition of Sika Waterbar® FB-125 to Sika Waterbar® D (PVC based)



- Sika Waterbar® D-19 standard profile to seal expansion joint

KNOW-HOW FROM SITE TO SHELF



Our most current General Sales Conditions shall apply.
Please consult the most current local Product Data Sheet prior to any use.

SIKA IRELAND LIMITED

Sika House
Ballymun Industrial Estate
Dublin
D11 DA2V
Ireland

Contact

Phone +353 1 862 0709
Fax +353 1 862 0707
E-Mail info@ie.sika.com
www.sika.ie
@Sikalreland

BUILDING TRUST



Sika Waterbar® FB-125 FLEXIBLE BONDED WATERSTOP FOR CONSTRUCTION JOINTS



BUILDING TRUST



Sika Waterbar® FB-125

INTERNAL FLEXIBLE BONDED WATERSTOP FOR CONSTRUCTION JOINTS IN WATERTIGHT CONCRETE CONSTRUCTIONS

ASSEMBLY

Simple and fast assembly options are available.

- Simple jointing by adhering with SikaProof® Sandwich Tape



- Welding by hot-air gun is also applicable



YOUR BENEFITS

Sika Waterbar® FB-125 is the efficient, reliable and easy joint sealing solution for your basement waterproofing project.

HIGH PERFORMANCE, RELIABLE DURABLE SOLUTION

- No lateral water underflow
- Robust and durable
- High mechanical properties such as flexibility

YOUR QUALITY

LOWER RISK FOR LEAKAGES

EASY, FAST APPLICATION AND HANDLING

- Minimal number of joints, due to long rolls
- Easy jointing, by adhering or welding, no extra tools
- High flexibility and lightweight

YOUR TIME

INSTALLATION TIME SAVING

NO EXTRA DESIGN AND PREPARATION WORK REQUIRED

- No extra rebar recess or kicker required
- No extra designed details needed
- No obstructions during concrete casting

YOUR MONEY

TOTAL COST SAVING

USE

For construction joints in watertight concrete structures. Can be combined easily with Sika Waterbar® D for expansion joints. The section on the right through the construction joint slab to wall shows the minimum embedding depth of 30 mm.

