

## SYSTEM DATA SHEET

# Sika Comfortfloor® PS-23

SEAMLESS, SMOOTH, UNICOLOUR, LOW VOC, ELASTIC POLYURETHANE FLOOR COVERING

### PRODUCT DESCRIPTION

Sika Comfortfloor® PS-23 is a highly elastic polyurethane self-smoothing flooring system and is part of the Sika Comfortfloor® decorative flooring range. Sika Comfortfloor® PS-23 system is especially designed for indoor applications where high comfort under feet, design, jointless surface and soft footfall are required. Sika Comfortfloor® PS-23 consists of a highly elastic, crack bridging polyurethane base coat which fulfils as well the stringent demands for low VOC emitting products.

### USES

Sika Comfortfloor® PS-23 installation works to be carried out only by Sika Approved Contractors. Please observe information given by Product Data Sheets.

- Healthcare – Medical sector
- Education (e.g. Schools and Universities)
- Leisure & Culture (e.g. Museums, Libraries)
- Retail & Residential

### CHARACTERISTICS / ADVANTAGES

- Decorative & Comfortable
- Soft footfall
- Odourless
- Good resistance to fire
- Low VOC content
- Crack-bridging
- Silky matt finish
- Good mechanical and abrasion resistance
- Easy application
- Easy to keep clean and maintain

### ENVIRONMENTAL INFORMATION

- Eurofins Emission tested according to the AgBB-scheme and guidelines of the DiBt (AgBB – Committee for Health-related Evaluation of Building Products, DiBt – German Institute for Building Technology). Sampling, testing and evaluation were performed according to ISO-16000, Report No. 770029B
- Conformity with LEED v2009 IEQc 4.2: Low-Emitting Materials - Paints and Coatings


### APPROVALS / STANDARDS

- Fire classification according to EN 13501-1, Test institute Hoch Fladungen Germany, Report No. KB-Hoch-090977
- Cleanroom® suitable material as part of the Sika ComfortFloor® system for particle emission and biological resistance. Fraunhofer IPA, Germany report no. SI 1008-533
- Impact sound reduction according EN ISO 140-8, test report 102-B-08, Iba Institut Gottfried & Rolof Germany.
- Resistance to stubbed and burning cigarettes in accordance with EN 1399 Method A\_102-E-08
- Determination of wear resistance EN 651:2004, indentation EN 433:2004 and effect of simulated movement of furniture leg according EN 424:2002 reports 391578-02 TFI institute Aachen Germany.
- M1 emission class approved by RTS Finland.
- Synthetic resin screed material according to EN 13813:2002, Declaration of Performance and provided with the CE mark
- Surface protection coating for concrete according to EN 1504-2:2004, Declaration of Performance and provided with the CE mark

# SYSTEM INFORMATION

## System Structure

Sika Comfortfloor® PS-23

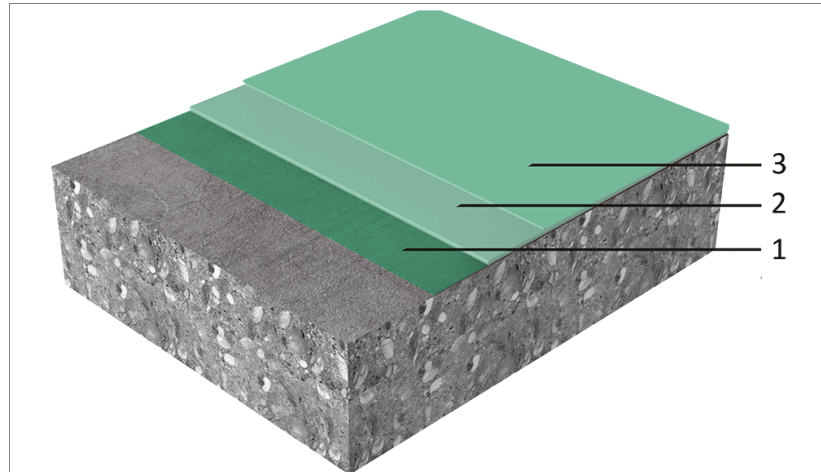

Layer	Product
1. Primer	Sikafloor®-156/-161
2. Base coat	Sikafloor®-330
3. Top coat	Sikafloor®-305W

<b>Composition</b>	Polyurethane
<b>Appearance</b>	Smooth, matt finish
<b>Colour</b>	Available in almost unlimited choice of colour shades.
<b>Nominal Thickness</b>	~ 2-3 mm
<b>Volatile organic compound (VOC) content</b>	Very low content of Volatile Organic Compounds. It fulfils the stringent demands for indoor air quality and low VOC emitting products AFFSET, M1, AgBB, EMICODE and A+.

## TECHNICAL INFORMATION

<b>Shore A Hardness</b>	~ 80 (14 days/+23°C)	(DIN 53505)
<b>Resistance to Wearing</b>	Wearing group P	(EN 660-2:1999)
<b>Resistance to moving furniture</b>	No damage	(EN 424:2002)
<b>Castor chair resistance</b>	No damage (25000 cycles)	(EN 425:1994)
<b>Resistance to Impact</b>	Class I (~ 4 N/m)	(ISO 6272)
<b>Indentation</b>	0.05 mm	(EN 433:1994)
<b>Tensile Strength</b>	~ 8.0 N/mm <sup>2</sup> (14 days/+23°C/Base coat)	(DIN 53504)
<b>Tensile Adhesion Strength</b>	> 1.5 N/mm <sup>2</sup>	(EN 13892-8)
<b>Elongation at Break</b>	~ 150% (14 days/+23°C/Base coat)	(DIN 53504)
<b>Reaction to Fire</b>	Bfl-s1	(EN 13501-1)
<b>Resistance to Stubbed Cigarettes</b>	Class 4	(EN 1399)
<b>Chemical Resistance</b>	Sika Comfortfloor® PS-23 always has to be sealed with Sikafloor®-305 W. Refer to the chemical resistance of Sikafloor®-305 W.	
<b>UV Exposure</b>	8 / Colour fastness	(EN ISO 105-B02:2002)

<b>USGBC LEED Rating</b>	Conforms Section EQ (Indoor Environmental Quality), Credit 4.2 Low-Emitting Materials Paints and Coatings. Calculated VOC content ≤ 50 g/l	
<b>Sound Insulation</b>	2 dB	(EN ISO 140-8)
<b>Skid / Slip Resistance</b>	R10 / R11	(DIN 51130)

## APPLICATION INFORMATION

<b>Consumption</b>	<b>Layer</b>	<b>Product</b>	<b>Consumption</b>	
	1. Primer	Sikafloor®-156/-161	~0.4 kg/m <sup>2</sup> /layer	
	2. Base coat	Sikafloor®-330	~2.6–2.8 kg/m <sup>2</sup> (2 mm)	
	3. Top coat	Sikafloor®-305W + 5% water	~0.15 kg/m <sup>2</sup> /layer	
Consumptions are theoretical and do not include any wastage or additional materials needed due to porosity, substrate profile etc.				
<b>Product Temperature</b>	+15 °C min. / +30 °C max.			
<b>Ambient Air Temperature</b>	+15 °C min. / +30 °C max.			
<b>Relative Air Humidity</b>	80 % max.			
<b>Dew Point</b>	Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or other disturbance of the surface on the floor finish			
<b>Substrate Temperature</b>	+15 °C min. / +30 °C max.			
<b>Substrate Moisture Content</b>	Sika Comfortfloor® PS-23 can be installed on substrates with moisture content of max. 4% (checked by Tramex). The substrate needs to be visibly dry and have adequate pull-off strength min 1.5 N/mm <sup>2</sup> . Check rising moisture.			
<b>Applied Product Ready for Use</b>	<b>Temperature</b>	<b>Foot traffic</b>	<b>Light traffic</b>	<b>Full cure</b>
	+15 °C	~30 hours	~48 hours	~6 days
	+20 °C	~16 hours	~24 hours	~4 days
	+30 °C	~12 hours	~18 hours	~3 days
Note: Times are approximate and will be affected by changing ambient and substrate conditions				

## PRODUCT INFORMATION

<b>Packaging</b>	Please refer to the individual Product Data Sheets
<b>Shelf Life</b>	Please refer to the individual Product Data Sheets
<b>Storage Conditions</b>	Please refer to the individual Product Data Sheets

## MAINTENANCE

### CLEANING

Please refer to the Sikafloor®- Cleaning Regime

## FURTHER DOCUMENTS

Substrate quality & Preparation  
Please refer to Sika Information Manual: "Evaluation and preparation of surfaces for flooring systems".  
Application instructions

Please refer to Sika Information Manual: "Mixing & Application of flooring systems".

Maintenance

Please refer to "Sikafloor®- Cleaning regime".

## LIMITATIONS

- Freshly applied Sikafloor® products must be protected from damp, condensation and water for at least 24 hours.
- Uncured material reacts in contact with water (foaming).
- During application care must be taken that no sweat drops into fresh Sikafloor® products (wear head and wrist bands).
- For exact colour matching, ensure the Sikafloor® product in each area is applied from the same control batch number.
- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to imprints in the resin.
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO<sub>2</sub> and H<sub>2</sub>O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

## VALUE BASE

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

## ECOLOGY, HEALTH AND SAFETY

Local safety regulations must be observed and it advisable to wear PPI when working with this product with particular attention paid to cutting and handling. Transportation Class: The product is not classified as hazardous good for transport. Disposal: The material is recyclable. Disposal must be according to local regulations. Please contact your local Sika sales organisation for more information.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

### SIKA IRELAND LIMITED

Ballymun Industrial Estate  
Ballymun  
Dublin 11, Ireland  
Tel: +353 1 862 0709  
Web: [www.sika.ie](http://www.sika.ie)  
Twitter: @Sikalreland



**System Data Sheet**  
Sika Comfortfloor® PS-23  
November 2019, Version 02.01  
020812900000000001

SikaComfortfloorPS-23-en-IE-(11-2019)-2-1.pdf

