

## SYSTEM DATA SHEET

# Sikafloor® MultiDur ES-39

SMOOTH, TOUGH-ELASTIC, UNICOLOUR EPOXY FLOOR COVERING WITH IMPROVED CHEMICAL RESISTANCE

### PRODUCT DESCRIPTION

Sikafloor® MultiDur ES-39 is a smooth, tough-elastic, coloured epoxy covering with improved chemical resistance for flooring applications

### USES

Sikafloor® MultiDur ES-39 installation works to be carried out only by Sika Approved Contractors. Please observe information given by Product Data Sheets.

Crack-bridging and chemically resistant coating for concrete and screed surfaces in bund areas for the protection against water contaminating liquids

### CHARACTERISTICS / ADVANTAGES

- Improved chemical resistance
- Crack-bridging
- Liquid proof


### APPROVALS / STANDARDS

- Fire classification in accordance with DIN EN 13501-1: 2010, class Bfl-S1, Report-No. KB-Hoch-141525, Germany, January, 2015
- Approval as "Water protection system", Z-59.12-392, DIBt, Germany
- Static crack-bridging test, class A5 according to EN-1262-7, Report No.PB 5.1/12-099-1, MFPA Leipzig GmbH, Germany, September 2012

# SYSTEM INFORMATION

## System Structure

## Sikafloor® MultiDur ES-39

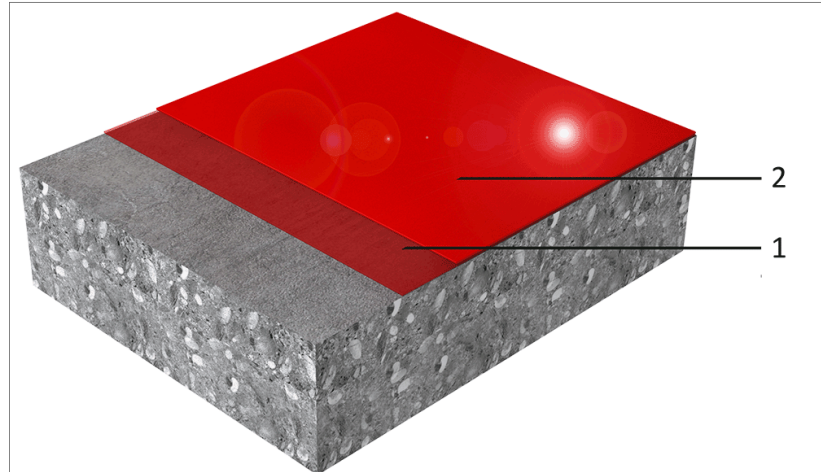

Layer	Product
1. Primer	Sikafloor®-156/-161
2. Wearing coat	Sikafloor®-390 N

Composition	Epoxy
Appearance	Smooth, gloss finish
Colour	Available in various colour shades.
Nominal Thickness	~2.0–3.0 mm

## TECHNICAL INFORMATION

Shore D Hardness	~60 (7 days at 23°C)	ZG (German Standard for water protection)
Crack Bridging Ability	0.4 mm Static, class A5 (23 °C)	(DIN EN 1062-7)
Reaction to Fire	Bfl-S1	(DIN EN 13501-1)
Chemical Resistance	Please refer to the chemical resistance of Sikafloor®-390 N	
Thermal Resistance	<b>Exposure*</b>	<b>Dry heat</b>
	Permanent	+50 °C
	Short-term max. 7 d	+80 °C
	Short-term max. 12 h	+100 °C
Short-term moist/wet heat* up to +80 °C where exposure is only occasional (i.e. during steam cleaning etc.)		
*No simultaneous chemical and mechanical exposure.		

## APPLICATION INFORMATION

Consumption	Sikafloor® MultiDur ES-39 system (~2–3 mm)		
	<b>Coating System</b>	<b>Product</b>	<b>Consumption</b>
	Primer	1 × Sikafloor®-156/-161	~0.3–0.5 kg/m <sup>2</sup>
	Wearing coat	Sikafloor®-390 N (un-filled)	~1.6 kg/m <sup>2</sup> /mm
Product Temperature	Please refer to the individual Product Data Sheet		
Ambient Air Temperature	+10 °C min. / +30 °C max.		
Relative Air Humidity	80 % r.h. max.		
Dew Point	Beware of condensation!		

The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or blooming on the floor finish.

<b>Substrate Temperature</b>	+10 °C min. / +30 °C max.		
<b>Substrate Moisture Content</b>	When performing application work with Sikafloor® MultiDur ES-39, the substrate moisture content must not exceed 4 % pbw measured by Tramex. Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).		
<b>Waiting Time / Overcoating</b>	Before applying Sikafloor®-390 N on Sikafloor®-156/161/160 allow:		
	<b>Substrate temperature</b>	<b>Minimum</b>	<b>Maximum</b>
	+10 °C	24 hours	4 days
	+20 °C	12 hours	2 days
	+30 °C	8 hours	1 day
	Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.		
<b>Applied Product Ready for Use</b>	<b>Temperature</b>	<b>Foot traffic</b>	<b>Light traffic</b>
	+10 °C	~48 hours	~6 days
	+20 °C	~30 hours	~4 days
	+30 °C	~20 hours	~3 days
	For traffic with solid / hard wheeled lift trucks allow 3 weeks curing time.		

## PRODUCT INFORMATION

<b>Packaging</b>	Please refer to the individual Product Data Sheet
<b>Shelf Life</b>	Please refer to the individual Product Data Sheet
<b>Storage Conditions</b>	Please refer to the individual Product Data Sheet

## MAINTENANCE

### CLEANING

Please refer to the Sikafloor®- Cleaning Regime

### FURTHER DOCUMENTS

Please refer to :

- Sika® Information Manual Mixing & Applications of Flooring systems
- Sika® Information Manual Evaluation and Preparation of Surfaces for Flooring systems

### LIMITATIONS

- Do not apply Sikafloor® MultiDur ES-39 on substrates with rising moisture.
- Freshly applied Sikafloor® MultiDur ES-39 must be protected from damp, condensation and water for at

least 24 hours.

- The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.
- For exact colour matching, ensure the Sikafloor®-390 N in each area is applied from the same control batch numbers.
- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to imprints in the resin.
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO<sub>2</sub> and H<sub>2</sub>O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

### VALUE BASE

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary

due to circumstances beyond our control.

## LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

## ECOLOGY, HEALTH AND SAFETY

Local safety regulations must be observed and it advisable to wear PPI when working with this product with particular attention paid to cutting and handling. Transportation Class: The product is not classified as hazardous good for transport. Disposal: The material is recyclable. Disposal must be according to local regulations. Please contact your local Sika sales organisation for more information.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

**SIKA IRELAND LIMITED**  
Ballymun Industrial Estate  
Ballymun  
Dublin 11, Ireland  
Tel: +353 1 862 0709  
Web: [www.sika.ie](http://www.sika.ie)  
Twitter: @Sikalreland



**System Data Sheet**  
Sikafloor® MultiDur ES-39  
November 2019, Version 01.01  
020811900000000015

SikafloorMultiDurES-39-en-IE-(11-2019)-1-1.pdf

