

## SYSTEM DATA SHEET

# Sikafloor® MultiDur EB-20

Slip-resistant, sand broadcasted, coloured, epoxy floor coating system

## PRODUCT DESCRIPTION

Sikafloor® MultiDur EB-20 is a sand broadcasted, coloured, rigid floor coating system based on epoxy resins. It provides a hard-wearing, seamless, low-maintenance gloss finish.

## USES

Sikafloor® MultiDur EB-20 installation works to be carried out only by Sika Approved Contractors. Please observe information given by Product Data Sheets.

Sikafloor® MultiDur EB-20 is used in industrial buildings such as:

- Car park decks
- Food and beverage facilities
- Logistics facilities and warehouses
- Manufacturing facilities and workshops

Please note:

- The System may only be used for interior applications.

## CHARACTERISTICS / ADVANTAGES

- Low odour
- Low VOC emissions
- Good resistance to abrasion
- Good resistance to specific chemicals
- Good mechanical resistance
- Seamless


## APPROVALS / STANDARDS

- Reaction to fire EN 13501-1, Sikafloor® MultiDur EB-20, Ghent, Test Report No. CR 24-1081-02

# SYSTEM INFORMATION

## System Structure

Sikafloor® MultiDur EB-20

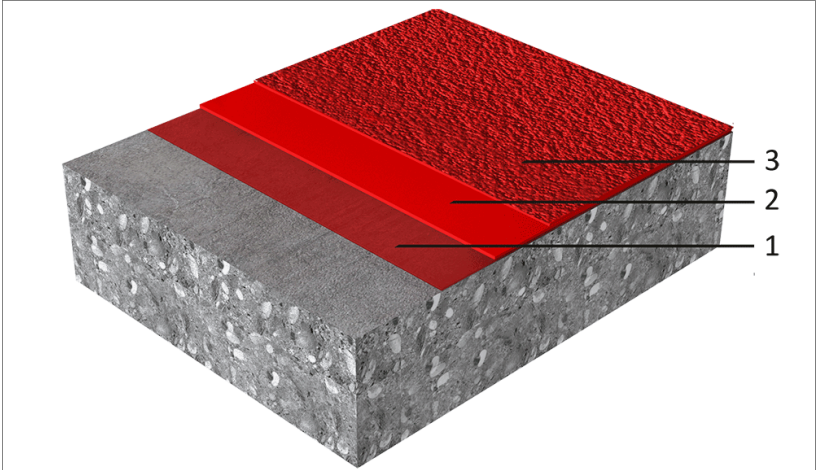

Layer	Product
1. Primer	Sikafloor®-150, or Sikafloor®-151, or Sikafloor®-1590
2. Wearing layer	Sikafloor®-264 Plus filled up to 1:1 with Quartz sand (0.1–0.3 mm)
3. Sand Broadcast	Broadcast with Quartz sand (0.3–0.8 mm)
4. Top coat	Sikafloor®-264 Plus

Contact Sika Technical Service for information on choosing the right primer for your project.

Composition	Epoxy
Appearance	Slip-resistant, gloss finish
Colour	Available in various colour shades
Nominal thickness	2 mm to 4 mm

## TECHNICAL INFORMATION

Tensile adhesion strength	≥ 1.5 MPa	(EN 1542)
Reaction to Fire	Class B <sub>fl</sub> -s1	(EN 13501-1)
Chemical Resistance	Laboratory-defined resistance to many individual chemicals. Before proceeding, contact Sika Technical Service for specific information.	
Skid / Slip Resistance	Class R 12	(DIN 51130)

## APPLICATION INFORMATION

Consumption	Layer	Product	Consumption	
	1. Primer	Sikafloor®-150, or Sikafloor®-151, or Sikafloor®-1590	1–2 × 0.3–0.5 kg/m²	
	2. Wearing layer	Sikafloor®-264 Plus filled up to 1:1 with Quartz sand (0.1–0.3 mm)	~ 4 kg /m2 (2 kg/m² binder + 2 kg/m² quartz sand)	
	3. Sand Broadcast	Broadcast with Quartz sand (0.3–0.8 mm)	4–6 kg/m²	
	4. Top coat	Sikafloor®-264 Plus	1 × 0.6–0.8 kg/m²	
Note: Consumption data is theoretical and does not allow for any additional material due to surface porosity, surface profile, variations in level, wastage or any other variations. Apply the product to a test area to calculate the exact consumption of the specific substrate conditions and proposed application equipment.				
Ambient Air Temperature	Maximum	+30 °C		
	Minimum	+10 °C		
Relative Air Humidity	Maximum	80 % r.h.		
Dew Point	Refer to the individual Product Data Sheet.			
Substrate Temperature	Maximum	+30 °C		
	Minimum	+10 °C		
Substrate Moisture Content	Refer to the individual Product Data Sheet.			
Waiting Time / Overcoating	When using Sikafloor®-1590 refer to the individual Product Data Sheet for specific information on waiting time to overcoating.			
	Before applying Sikafloor®-264 Plus on the primer layer allow:			
	Temperature	Minimum	Maximum	
	+10 °C	17 hours	3 days	
	+20 °C	9 hours	48 hours	
	+30 °C	7 hours	24 hours	
	Before applying Sikafloor®-264 Plus on Sikafloor®-264 Plus allow:			
	Temperature	Minimum	Maximum	
	+10 °C	30 hours	48 hours	
	+20 °C	24 hours	30 hours	
	+30 °C	16 hours	24 hours	
	Note: Times are approximate and will be affected by changing ambient conditions, particularly temperature and relative humidity.			
Applied Product Ready for Use	Temperature	Foot traffic	Light traffic	Full cure
	+10 °C	30 hours	6 days	10 days
	+20 °C	24 hours	4 days	7 days
	+30 °C	16 hours	2 days	5 days
	Note: Times are approximate and will be affected by changing ambient conditions, particularly temperature and relative humidity.			

## VALUE BASE

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## FURTHER DOCUMENTS

Refer to the following method statements:

- Sika Method Statement — Evaluation and preparation of surfaces for flooring systems
- Sika Method Statement — Sikafloor® mixing and application

## ECOLOGY, HEALTH AND SAFETY

Local safety regulations must be observed and it advisable to wear PPI when working with this product with particular attention paid to cutting and handling. Transportation Class: The product is not classified as hazardous good for transport. Disposal: The material is recyclable. Disposal must be according to local regulations. Please contact your local Sika sales organisation for more information.

## LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

### SIKA IRELAND LIMITED

Ballymun Industrial Estate  
Ballymun  
Dublin 11, Ireland  
Tel: +353 1 862 0709  
Web: [www.sika.ie](http://www.sika.ie)  
Twitter: @SikaIreland



### System Data Sheet

Sikafloor® MultiDur EB-20  
April 2025, Version 04.01  
02081190000000237

SikafloorMultiDurEB-20-en-IE-(04-2025)-4-1.pdf

