

## SYSTEM DATA SHEET

# Sikafloor® MultiDur EB-24

BROADCAST UNICOLOUR EPOXY FLOOR COVERING WITH HIGH MECHANICAL RESISTANCE

### PRODUCT DESCRIPTION

Sikafloor® MultiDur EB-24 is a slip resistant, coloured, epoxy covering with high mechanical resistance for flooring applications

### USES

Sikafloor® MultiDur EB-24 installation works to be carried out only by Sika Approved Contractors. Please observe information given by Product Data Sheets.

- for concrete and cement screeds with normal up to medium heavy wear e.g. storage and assembly halls, maintenance workshops, garages and loading ramps.
- for multi-storey and underground car parks and for wet process areas, e.g. beverage and food industry

### CHARACTERISTICS / ADVANTAGES


- High wear resistance
- High mechanical resistance
- Good chemical resistance
- Easy application
- Waterproof
- Gloss finish
- Slip resistant

### APPROVALS / STANDARDS

- Fire classification test, Bfl-S1 according to DIN EN 13501-1, Report No.2007-B-0181/15, Germany, July 2007

# SYSTEM INFORMATION

## System Structure

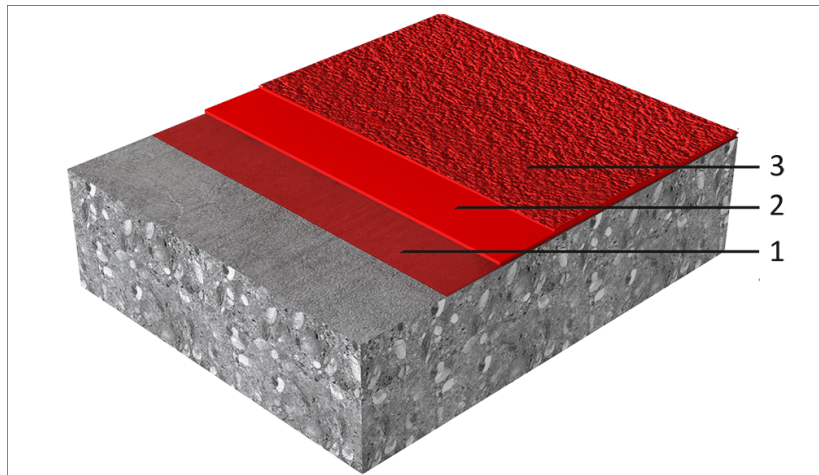

### Sikafloor® MultiDur EB-24 system (~ 2–4 mm)

1. Primer	Sikafloor®-156/-161
2. Wearing coat & broadcast in excess	Sikafloor®-263 SL or Sikafloor®-264 broadcast with quartz sand in excess
3. Top coat	Sikafloor®-264

<b>Composition</b>	Epoxy
<b>Appearance</b>	Slip resistant, gloss finish
<b>Colour</b>	Available in various colour shades.
<b>Nominal Thickness</b>	~2.0–4.0 mm

## TECHNICAL INFORMATION

<b>Reaction to Fire</b>	Bfl-S1	(DIN EN 13501-1)
<b>Chemical Resistance</b>	Refer to the chemical resistance of Sikafloor®-264	
<b>Thermal Resistance</b>	<b>Exposure*</b>	<b>Dry heat</b>
	Permanent	+50 °C
	Short-term max. 7 d	+80 °C
	Short-term max. 12 h	+100 °C
	Short-term moist/wet heat* up to +80 °C where exposure is only occasional (i.e. during steam cleaning etc.) *No simultaneous chemical and mechanical exposure.	
<b>Skid / Slip Resistance</b>	R11 V4 (Quartz Sand 0.3-0.8 mm)	(DIN 51130)
	R12 V6 (Quartz Sand 0.6-1.2 mm)	(DIN 51130)



## APPLICATION INFORMATION

<b>Consumption</b>	Sikafloor® MultiDur EB-24 system (~ 2–4mm)			
	<b>Coating System</b>	<b>Product</b>	<b>Consumption</b>	
	Primer	1 x Sikafloor®-156 /-161	~ 0.3–0.5 kg/m <sup>2</sup>	
	Wearing coat	Sikafloor®-263 SL or Sikafloor®-264 filled 1:1 with quartz sand 0.06–0.3mm	~ 4 kg /m <sup>2</sup> ( 2 kg/m <sup>2</sup> binder + 2 kg/m <sup>2</sup> quartz sand)	
	Broadcast in excess	quartz sand 0.3 – 0.8 mm	~ 4–6 kg/m <sup>2</sup>	
Top coat	1–2 x Sikafloor®-264	~0.6–0.8 kg/m <sup>2</sup>		
<b>Product Temperature</b>	Please refer to the individual Product Data Sheet			
<b>Ambient Air Temperature</b>	+10 °C min. / +30 °C max.			
<b>Relative Air Humidity</b>	80 % r.h. max.			
<b>Dew Point</b>	Beware of condensation! The substrate and uncured floor must be at least 3 °C above dew point to reduce the risk of condensation or blooming on the floor finish.			
<b>Substrate Temperature</b>	+10 °C min. / +30 °C max.			
<b>Substrate Moisture Content</b>	When performing application work with Sikafloor® MultiDur EB-24, the substrate moisture content must not exceed 4 % pbw measured by Tramex. Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).			
<b>Waiting Time / Overcoating</b>	Before applying Sikafloor®–263 SL /-264 on Sikafloor®-156/161 allow:			
	<b>Substrate temperature</b>	<b>Minimum</b>	<b>Maximum</b>	
	+10 °C	24 hours	3 days	
	+20 °C	12 hours	2 days	
	+30 °C	8 hours	1 day	
	Before applying Sikafloor®–264 on Sikafloor®–263 SL /-264 allow:			
	<b>Substrate temperature</b>	<b>Minimum</b>	<b>Maximum</b>	
	+10 °C	30 hours	48 hours	
	+20 °C	24 hours	24 hours	
	+30 °C	16 hours	30 hours	
Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity				
<b>Applied Product Ready for Use</b>	<b>Temperature</b>	<b>Foot traffic</b>	<b>Light traffic</b>	<b>Full cure</b>
	+10 °C	~ 72 hours	~ 6 days	~ 10 days
	+20 °C	~ 24 hours	~ 4 days	~ 7 days
	+30 °C	~ 18 hours	~ 2 days	~ 5 days

## PRODUCT INFORMATION

<b>Packaging</b>	Please refer to the individual Product Data Sheet
<b>Shelf Life</b>	Please refer to the individual Product Data Sheet
<b>Storage Conditions</b>	Please refer to the individual Product Data Sheet

## MAINTENANCE

### CLEANING

Please refer to the Information Manual Sikafloor®-Cleaning Regime

### FURTHER DOCUMENTS

Please refer to :

- Sika® Information Manual Mixing & Applications of Flooring systems
- Sika® Information Manual Evaluation and Preparation of Surfaces for Flooring systems

### LIMITATIONS

- Do not apply Sikafloor® MultiDur EB-24 on substrates with rising moisture.
- Freshly applied Sikafloor® MultiDur EB-24 must be protected from damp, condensation and water for at least 24 hours.
- The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.
- For exact colour matching, ensure the Sikafloor®-264 in each area is applied from the same control batch numbers.
- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to imprints in the resin.
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO<sub>2</sub> and H<sub>2</sub>O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

### VALUE BASE

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

## ECOLOGY, HEALTH AND SAFETY

Local safety regulations must be observed and it advisable to wear PPI when working with this product with particular attention paid to cutting and handling. Transportation Class: The product is not classified as hazardous good for transport. Disposal: The material is recyclable. Disposal must be according to local regulations. Please contact your local Sika sales organisation for more information.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

#### SIKA IRELAND LIMITED

Ballymun Industrial Estate  
Ballymun  
Dublin 11, Ireland  
Tel: +353 1 862 0709  
Web: [www.sika.ie](http://www.sika.ie)  
Twitter: @Sikalreland



System Data Sheet  
Sikafloor® MultiDur EB-24  
November 2019, Version 04.01  
02081190000000017

SikafloorMultiDurEB-24-en-IE-(11-2019)-4-1.pdf