

SYSTEM DATA SHEET

Sikafloor® MultiFlex PB-56

Coloured, slip-resistant, crack-bridging car park decking system

PRODUCT DESCRIPTION

Sikafloor® MultiFlex PB-56 is a coloured, crack-bridging polyurethane car park decking system. It provides a hard-wearing, low-maintenance, slip-resistant finish.

USES

Sikafloor® MultiFlex PB-56 installation works to be carried out only by Sika Approved Contractors. Please observe information given by Product Data Sheets.

Sikafloor® MultiFlex PB-56 is used in the following commercial and public buildings and areas:

- Car park decks

Please note:

- The System may only be used for interior applications.

CHARACTERISTICS / ADVANTAGES

- Good resistance to abrasion
- Good crack-bridging ability
- Good mechanical resistance
- Good yellowing resistance
- Good resistance to specific chemicals
- Seamless
- Impermeable to liquids


APPROVALS / STANDARDS

- Parking Abrasion Sikafloor® MultiFlex PB-56, Technische Universität Kaiserslautern
- Slip resistance DIN EN 16165, Roxeler, Certificate No. 020221-22-14
- Fire Classification report EN 13501-1, Ofi, No. 1902052-12

SYSTEM INFORMATION

System Structure

Sikafloor® MultiFlex PB-56

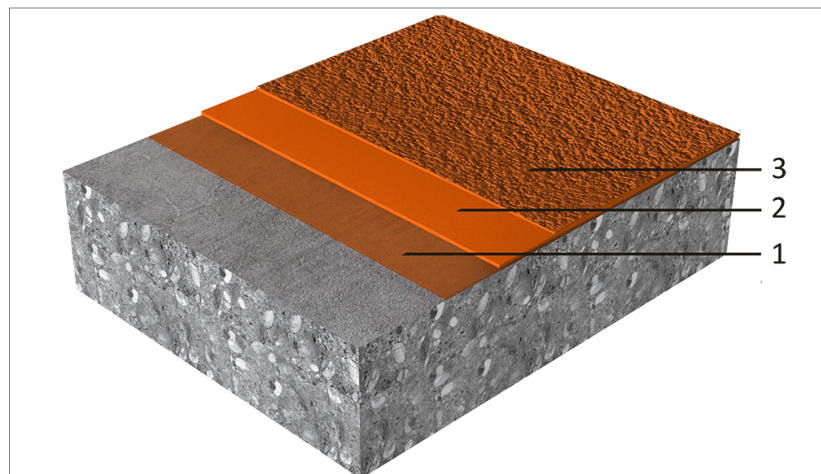

Layer	Product
1. Primer	Sikafloor®-150 Sikafloor®-151 Sikafloor®-156 Sikafloor®-161 Sikafloor®-1590 Contact Sika technical service for information on choosing the right primer for your project.
2. Wearing layer	Sikafloor®-376 + broadcast in excess with Quartz sand (0.3–0.8 mm)
3. Top coat	Sikafloor®-378

Composition	Epoxy and Polyurethane
Appearance	Slip-resistant, glossy finish
Colour	Available in various colour shades.
Nominal thickness	4–5 mm

TECHNICAL INFORMATION

Resistance to wearing	AR0,5	(BS EN 13892-4)
Resistance to Impact	IR1	(EN ISO 6272-1)
Tensile adhesion strength	> 1.5 N/mm ²	(EN 1542)
Reaction to Fire	Class B _{fl} -s1	(EN 13501-1)
Chemical Resistance	Laboratory-defined resistance to many individual chemicals. Before proceeding, contact Sika Technical Service for specific information.	
Skid / Slip Resistance	Class	R 11; V 4 (DIN 51130)

APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	Primer	Sikafloor®-150	0.4 kg/m ² per primer layer
		Sikafloor®-151	
		Sikafloor®-156	
	Wearing layer	Sikafloor®-161	1.0 kg/m ² broadcast
		Sikafloor®-1590	
		Quartz sand (0.3–0.8 mm)	
	Wearing layer	Sikafloor®-376 filled 1 : 0.2 with Quartz sand (0.1–0.3 mm)	2.1 kg/m ² (resin) + 0.42 kg/m ² (quartz sand) 4–6 kg/m ² broadcast
		Broadcast with Quartz sand (0.1–0.3 mm)	
		Sikafloor®-378	
	Top coat	Sikafloor®-378	0.4–0.6 kg/m ²

The application rate of Sikafloor®-376 is dependent on the substrate surface roughness, R_z:

R _z = 0.0	2.1 kg/m ² (resin) + 0.42 kg/m ² (quartz sand)
R _z = 0.5	2.45 kg/m ² (resin) + 0.49 kg/m ² (quartz sand)
R _z = 1.0	2.75 kg/m ² (resin) + 0.55 kg/m ² (quartz sand)

NOTE

Consumption data is theoretical and does not allow for any additional material due to surface porosity, surface profile, variations in level, wastage or any other variations. Apply the Product to a test area to calculate the exact consumption for the specific substrate conditions and proposed application equipment.

Layer Thickness	Refer to the relevant System Data Sheet													
Ambient Air Temperature	Maximum	+30 °C												
	Minimum	+10 °C												
Relative Air Humidity	Maximum	80 % r.h.												
Dew Point	Refer to the individual Product Data Sheet.													
Substrate Temperature	Maximum	+30 °C												
	Minimum	+10 °C												
Substrate Moisture Content	Refer to the individual Product Data Sheet.													
Waiting Time / Overcoating	When using Sikafloor®-1590 refer to the individual Product Data Sheet for specific information on waiting time to overcoating.													
	Before applying Sikafloor®-376 on the primer allow: <table border="1"><thead><tr><th>Temperature</th><th>Minimum</th><th>Maximum</th></tr></thead><tbody><tr><td>+10 °C</td><td>17 hours</td><td>4 days</td></tr><tr><td>+20 °C</td><td>9 hours</td><td>2 days</td></tr><tr><td>+30 °C</td><td>7 hours</td><td>1 day</td></tr></tbody></table>			Temperature	Minimum	Maximum	+10 °C	17 hours	4 days	+20 °C	9 hours	2 days	+30 °C	7 hours
Temperature	Minimum	Maximum												
+10 °C	17 hours	4 days												
+20 °C	9 hours	2 days												
+30 °C	7 hours	1 day												
	Before applying Sikafloor®-378 on the broadcasted Sikafloor®-376 allow: <table border="1"><thead><tr><th>Temperature</th><th>Waiting time</th></tr></thead><tbody><tr><td>+10 °C</td><td>24 hours</td></tr><tr><td>+20 °C</td><td>15 hours</td></tr><tr><td>+30 °C</td><td>8 hours</td></tr></tbody></table>			Temperature	Waiting time	+10 °C	24 hours	+20 °C	15 hours	+30 °C	8 hours			
Temperature	Waiting time													
+10 °C	24 hours													
+20 °C	15 hours													
+30 °C	8 hours													
	Note: Times are approximate and will be affected by changing ambient conditions, particularly temperature and relative humidity.													
Applied Product Ready for Use	Temperature	Foot traffic	Light traffic	Full cure										
	+10 °C	72 hours	6 days	10 days										
	+20 °C	24 hours	4 days	7 days										
	+30 °C	18 hours	2 days	5 days										
	Note: Times apply when the last layer of the system has been applied. Times are affected by changing ambient conditions, particularly temperature and relative humidity.													

VALUE BASE

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

ECOLOGY, HEALTH AND SAFETY

Local safety regulations must be observed and it advisable to wear PPI when working with this product with particular attention paid to cutting and handling.

Transportation Class: The product is not classified as hazardous good for transport. Disposal: The material is recyclable. Disposal must be according to local regulations. Please contact your local Sika sales organisation for more information.

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA IRELAND LIMITED

Ballymun Industrial Estate
Ballymun
Dublin 11, Ireland
Tel: +353 1 862 0709
Web: www.sika.ie
Twitter: @Sikalreland



System Data Sheet

Sikafloor® MultiFlex PB-56
August 2024, Version 02.01
02081290000000056

SikafloorMultiFlexPB-56-en-IE-(08-2024)-2-1.pdf

