

SYSTEM DATA SHEET

Sikafloor® MultiFlex PB-32 UV

UV-resistant, slip-resistant, tough-elastic polyurethane flooring system

PRODUCT DESCRIPTION

Sikafloor® MultiFlex PB-32 UV is a UV-resistant, slip-resistant, tough-elastic polyurethane flooring system. It is part of the Sikafloor® MultiFlex flooring range.

USES

Sikafloor® MultiFlex PB-32 UV installation works to be carried out only by Sika Approved Contractors. Please observe information given by Product Data Sheets.

The System is used in industrial buildings such as:

- Automotive facilities
- Logistics facilities and warehouses
- Car park decks

Please note:

- The System may only be used for exterior applications.

CHARACTERISTICS / ADVANTAGES

- Good resistance to UV exposure
- Good mechanical resistance
- Good resistance to specific chemicals
- Good resistance to abrasion
- Seamless
- Low VOC content
- Low maintenance


APPROVALS / STANDARDS

- Fire Classification Report EN 13501-1
- Slip resistance DIN 51130, Roxeler, Certificate No. 020068-18-11

SYSTEM INFORMATION

System Structure

Sikafloor® MultiFlex PB-32 UV

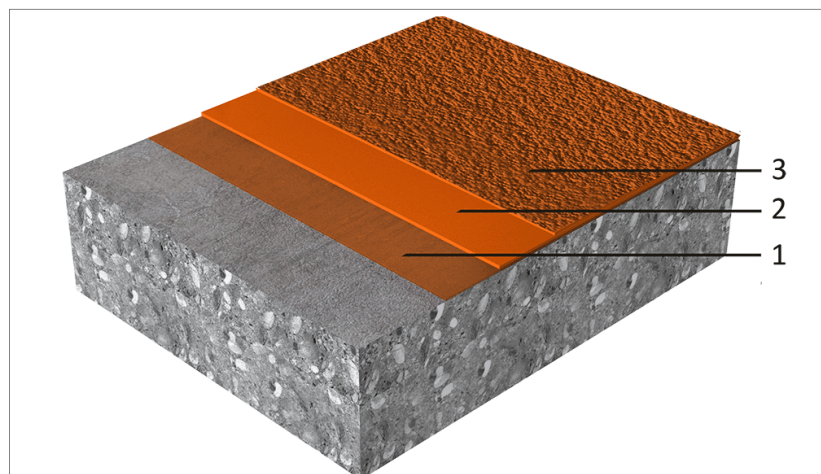

	Layer	Product
1.	Primer	Sikafloor®-150 Sikafloor®-151 Sikafloor®-156 Sikafloor®-161 Sikafloor®-1590 Contact Sika technical service for information on choosing the right primer for your project.
2.	Wearing layer	Sikafloor®-3240 filled 1 : 0.5 with Quartz sand (0.1–0.3 mm) by weight Broadcast to excess with Quartz sand (0.3–0.8 mm)
3.	Seal coat	Sikafloor®-359 N

For hot poured or mastic asphalt substrates use Sikafloor®-3240 as an alternative primer.

Composition	Polyurethane
Appearance	Slip resistant, matt finish
Colour	Available in various colour shades.
Nominal thickness	~3.0 mm

TECHNICAL INFORMATION

Tensile adhesion strength	≥ 1.5 MPa	(EN 1542)
Reaction to Fire	Class B _{fl} -s1	(EN 13501-1)
Skid / Slip Resistance	Class R 11	(DIN 51130)

APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	Primer	Sikafloor®-150 Sikafloor®-151 Sikafloor®-156 Sikafloor®-161 Sikafloor®-1590	1-2 × 0.3–0.5 kg/m ²
	Levelling	Sikafloor®-150 Sikafloor®-151 Sikafloor®-156 Sikafloor®-161 Sikafloor®-1590	Refer to the individual Product Data Sheet.
	Wearing layer	Sikafloor®-3240 filled 1 : 0.5 with Quartz sand (0.1–0.3 mm) by weight Broadcast to excess with Quartz sand (0.3–0.8 mm)	1 × 1.8–2.0 kg/m ² 4.0–5.0 kg/m ²
	Seal coat	Sikafloor®-359 N	1 × 0.7–0.9 kg/m ²

Note: Consumption data is theoretical and does not allow for any additional material due to surface porosity, surface profile, variations in level, wastage or any other variations. Apply product to a test area to calculate the exact consumption for the specific substrate conditions and proposed application equipment.

Ambient Air Temperature	Maximum	+30 °C			
	Minimum	+10 °C			
Relative Air Humidity	Maximum	80 % r.h.			
Dew Point	Refer to the individual Product Data Sheet.				
Substrate Temperature	Maximum	+30 °C			
	Minimum	+10 °C			
Substrate Moisture Content	Refer to the individual Product Data Sheet.				
Waiting Time / Overcoating	When using Sikafloor®-1590 refer to the individual Product Data Sheet for specific information on waiting time to overcoating.				
	Before applying Sikafloor®-3240 over the primer, allow:				
	Temperature	Minimum	Maximum		
	+10 °C	17 hours	4 days		
	+20 °C	9 hours	2 days		
	+30 °C	7 hours	1 day		
	Before applying Sikafloor®-359 N on Sikafloor®-3240 allow:				
	Temperature	Minimum	Maximum		
	+10 °C	24 hours	3 days		
	+20 °C	12 hours	48 hours		
	+30 °C	8 hours	36 hours		
	Note: Times are approximate and will be affected by changing ambient conditions, particularly temperature and relative humidity.				
	Applied Product Ready for Use	Temperature	Foot traffic	Light traffic	Full cure
		+10 °C	72 hours	6 days	10 days
		+20 °C	24 hours	4 days	7 days
+30 °C		18 hours	2 days	5 days	
Note: Times apply when the last layer of the system has been applied. Times are affected by changing ambient conditions, particularly temperature and relative humidity.					

VALUE BASE

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

FURTHER DOCUMENTS

Refer to the following method statements:

- Sika Method Statement — Evaluation and preparation of surfaces for flooring systems
- Sika Method Statement — Sikafloor® mixing and application

ECOLOGY, HEALTH AND SAFETY

Local safety regulations must be observed and it advisable to wear PPI when working with this product with particular attention paid to cutting and handling. Transportation Class: The product is not classified as hazardous good for transport. Disposal: The material is recyclable. Disposal must be according to local regulations. Please contact your local Sika sales organisation for more information.

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA IRELAND LIMITED

Ballymun Industrial Estate
Ballymun
Dublin 11, Ireland
Tel: +353 1 862 0709
Web: www.sika.ie
Twitter: @SikaIreland



System Data Sheet

Sikafloor® MultiFlex PB-32 UV
November 2025, Version 03.01
02081290000000043

SikafloorMultiFlexPB-32UV-en-IE-(11-2025)-3-1.pdf

