

SYSTEM DATA SHEET

Sikagard® WallCoat WS-11

SMOOTH, WATER BASED, LOW VOC/ AMC, EASY TO CLEAN COATING

PRODUCT DESCRIPTION

Sikagard® WallCoat WS-11 is a water based, coloured, low VOC / AMC emitting coating for walls and ceilings.

USES

Sikagard® WallCoat WS-11 installation works to be carried out only by Sika Approved Contractors. Please observe information given by Product Data Sheets.

- walls and ceilings in production areas with high ambient humidity
- walls and ceilings in clean rooms in the electronic industry
- walls and ceilings in food & beverage plants

CHARACTERISTICS / ADVANTAGES

- excellent decontamination properties
- easy to clean
- easy to apply
- low odour
- low VOC/ AMC emissions
- can be diluted with water

ENVIRONMENTAL INFORMATION

Conformity with LEED v2009 IEQc 4.2: Low-Emitting Materials - Paints and Coatings


APPROVALS / STANDARDS

- Measurement of biological resistance acc. ISO 846, Fraunhofer IPA, test report SI 1103-544
- Decontamination of surfaces acc. DIN 25415 (ISO 8690), LIF Magdeburg, test report 160209
- Coating for surface protection of concrete according to EN 1504-2:2004, Declaration of Performance 020807030010000002108, and provided with the CE marking.
- Measurement of out gassing properties acc. ISO 14644-8, ISO 16000-6,-9,-11, Fraunhofer IPA, test report SI 1103-544
- Behaviour to fire, classification acc. EN 13501-1, Bodycote Warrington Brandhaus, test report 2008-2023.1-K1
- Behaviour to fire, classification Acc. DIN 4102-1, MPA Dresden, test report 2008-B-1002/2

SYSTEM INFORMATION

System Structure

Sikagard® WallCoat WS-11

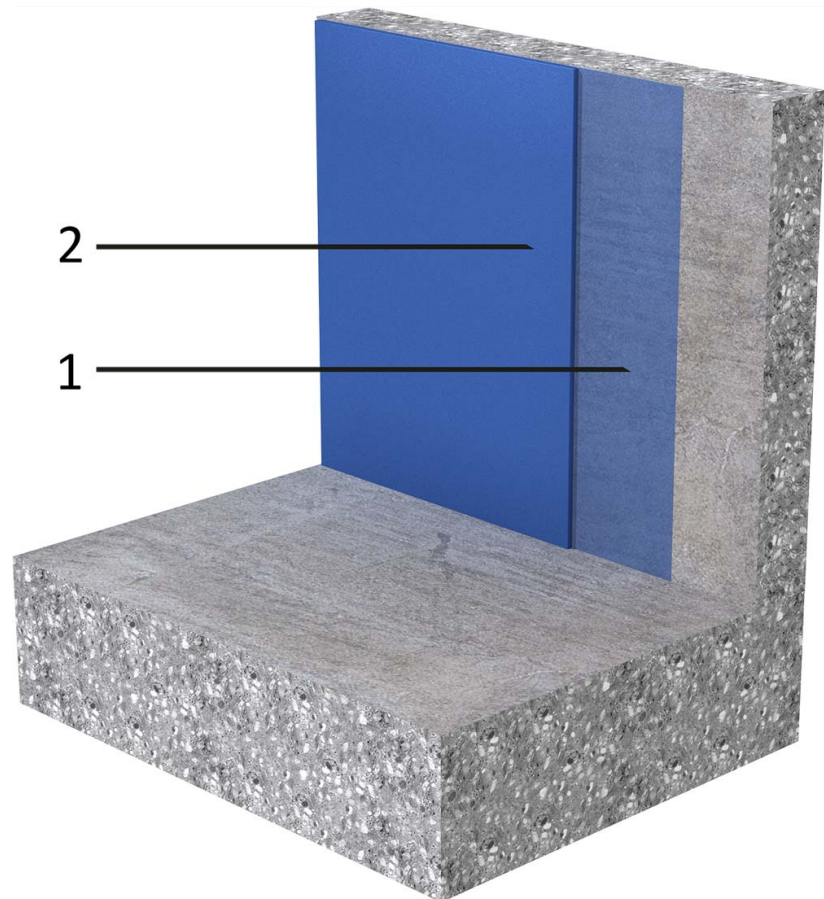

Layer	Product
1. Primer	Sikagard® Wallcoat N + 5% water
2. Top Coat	Sikagard® Wallcoat N

Composition	Epoxy waterborne
Colour	Standard colour RAL 7032, other on request
Nominal Thickness	~0.2 mm–0.3 mm

TECHNICAL INFORMATION

Abrasion Resistance	~ 100 mg (CS 10/ 1000/ 1000)	(DIN 53109 Taber Abraser Test)
Reaction to Fire	b-S1, d0 B1	(EN 13501-1) (DIN 4102)

Chemical Resistance	<p>Good resistance to mild acids, alkalis, cleaning agents and disinfectants. Please contact local Sika technical service for specific information.</p> <p>Disinfection with Hydrogen Peroxide Vapor:</p> <ul style="list-style-type: none"> ▪ Resistant when using STERIS VHP technology ▪ Resistant to PEA vaporisation technology according test report PEA ▪ Resistant when using Oxypharm vaporiser NOCOSPRAY® with the following set-up:
----------------------------	---

Disinfectant	Concentration	Setting at vaporiser	Contact time
NOCOLYSE® Mint (6%)	1 ml/m ³	20m ³ (1.5 min vaporisation)	30 min
NOCOLYSE® ONE Shot (12%)	3 ml/m ³ (2cycles)	45m ³ (5 minutes vaporisation)	30 min
NOCOLYSE® Food (7.9%)	1 ml/m ³	20m ³ (1.5 minutes vaporisation)	30 min
NOCOLYSE® Food (7.9%)	5 ml/m ³	75m ³ (5 minutes vaporisation)	60 min

Thermal Resistance	Permanent	+50 °C dry heat
	Max. 3 days	+80 °C dry heat
	Max. 12 hours	+100 °C dry heat

Microbiological Resistance		ISO Classification (acc. ISO 846)
	Funghi	0
	Bacteria	0

APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	1. Primer	Sikagard® Wallcoat N + 5 % water	0.20 kg/m ²
	2. Top Coat	Sikagard® Wallcoat N	0.28 kg/m ²

Product Temperature	+10 °C min. / +40 °C max.
---------------------	---------------------------

Ambient Air Temperature	+8 °C min. / +40 °C max.
-------------------------	--------------------------

Relative Air Humidity	≤ 75 % When relative air humidity is ≥ 75 % the overcoating time may extend up to 24h more.
-----------------------	--

Dew Point	Beware of condensation! The substrate temperature and uncured material must be at least 3 °C above dew point to reduce risk of condensation or blooming on the finish
-----------	--

Substrate Temperature	+8 °C min / +35 °C max.
-----------------------	-------------------------

Substrate Moisture Content	concrete: ≤ 6% when measured by Tramex meter concrete: ≤ 4% when measured with CM-method or oven-dry method No rising moisture according ASTM (polyethylene sheet)
----------------------------	--

Application Time	Temperature	Application Time
	+10 °C	~150 min
+20 °C	~90 min	
+30 °C	~60 min	

Waiting Time / Overcoating	Before applying Sikagard® Wallcoat N on Sikagard® Wallcoat N allow:		
	Substrate temperature	Minimum	Maximum
	+10 °C	3 h	7 d
	+20 °C	3 h	6 d
	+30 °C	2.5 h	3 d

PRODUCT INFORMATION

Packaging	Part A	14.6kg drums
	Part B	5.4kg drums

Shelf Life	Part A: 12 month
------------	------------------

Storage Conditions

From date of production if stored properly in closed, sealed and undamaged packaging in dry conditions at temperatures between +5°C ... +30°C. Protect from frost

MAINTENANCE

due to circumstances beyond our control.

In case the surface of the coating system has picked up too much dirt and can't be cleaned properly it should be maintained. Same will be necessary when the top coat has been contaminated from liquids penetrated into the near surface. The maintenance of the system can easily be done by easy grinding and recoating with one or two layers of the relevant top coat.

CLEANING

The top coat of the system is tested in acc. to EN 11998:2006, wet scrub resistance. Acc. EN 13300 the product is classified in class 1. The surface can be cleaned with a wet sponge, using mild detergents and rewashed with clean water.

LIMITATIONS

- Do not apply on substrates with rising moisture
- Freshly applied Sikagard® WallCoat WS-11 shall be protected from damp, condensation and water for at least 24 h
- Always ensure adequate fresh air ventilation while application and curing
- The appearance of the finish (gloss) may vary with changes in temperature and relative humidity during application
- With light colours, i.e. yellow, orange and red, the application of multiple layers may be necessary to ensure good opacity
- Exposed to direct UV radiation discolouration and deviation of colour may occur. The technical properties of the system are not influenced
- The incorrect assessment and treatment of cracks may lead to a reduced service life time and reflective cracking
- If exact colour matching is required ensure that in each area material from the same control batch number is used
- If heating is required don't use gas, oil, paraffin or other fossil fuel heaters. Due to the production of CO₂ and H₂O vapours the finish may be affected. For heating only use electrical powered heaters.

VALUE BASE

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

ECOLOGY, HEALTH AND SAFETY

Local safety regulations must be observed and it advisable to wear PPI when working with this product with particular attention paid to cutting and handling. Transportation Class: The product is not classified as hazardous good for transport. Disposal: The material is recyclable. Disposal must be according to local regulations. Please contact your local Sika sales organisation for more information.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA IRELAND LIMITED

Ballymun Industrial Estate
Ballymun
Dublin 11, Ireland
Tel: +353 1 862 0709
Web: www.sika.ie
Twitter: @Sikalreland



System Data Sheet
Sikagard® WallCoat WS-11
November 2019, Version 02.01
020811910000000001

SikagardWallCoatWS-11-en-IE-(11-2019)-2-1.pdf

