

SYSTEM DATA SHEET

Sikafloor® MultiFlex PB-56

POLYURETHANE CAR PARK DECKING SYSTEM

PRODUCT DESCRIPTION

Sikafloor® MultiFlex PB-56 is a polyurethane, coloured, elastic, crack-bridging, slip-resistant car park decking system and is part of the Sikafloor® Multiflex flooring range. It provides a hard wearing, seamless, chemical resistant, low maintenance, slip resistant finish when broadcast with different aggregate grades and sealed with a gloss finish seal coat. Thickness ~5.0 mm. Internal use.

USES

Sikafloor® MultiFlex PB-56 installation works to be carried out only by Sika Approved Contractors. Please observe information given by Product Data Sheets.

For car park decks:

- Non UV exposed
- Turning areas

CHARACTERISTICS / ADVANTAGES

- Waterproof
- High mechanical resistance
- Good chemical resistance
- Good abrasion resistance
- Textured gloss finish
- Low dirt pick up
- Easy cleanability
- Seamless
- Slip and skid resistant surface
- Scratch resistant surface
- Easy application
- Low maintenance

ENVIRONMENTAL INFORMATION


- Conformity with LEED v2009 IEQc 4.2: Low-Emitting Materials - Paints and Coatings - Sikafloor®-376

APPROVALS / STANDARDS

- Fire testing EN 13501-1, Sikafloor® Multiflex PB-56, Hoch, Report No. KB-Hoch-180052
- Coating system DAfStb Test Class OS 11, Sikafloor® MultiFlex PB-56, kiwa, Test report No. P 10777-2
- Wear resistance EN 13892-4, Sikafloor® Multiflex PB-56, kiwa, Report No. P 10777-5
- Surface Protection System EN 1504-2, Sikafloor® Multiflex PB-56, QDB, Certificate No. P 10777-2
- CE Marking and Declaration of Performance to EN 1504-2 - Surface protection product for concrete - Coating - Sikafloor®-156, Sikafloor®-160, Sikafloor®-161, Sikafloor®-376, Sikafloor®-378

SYSTEM INFORMATION

System Structure

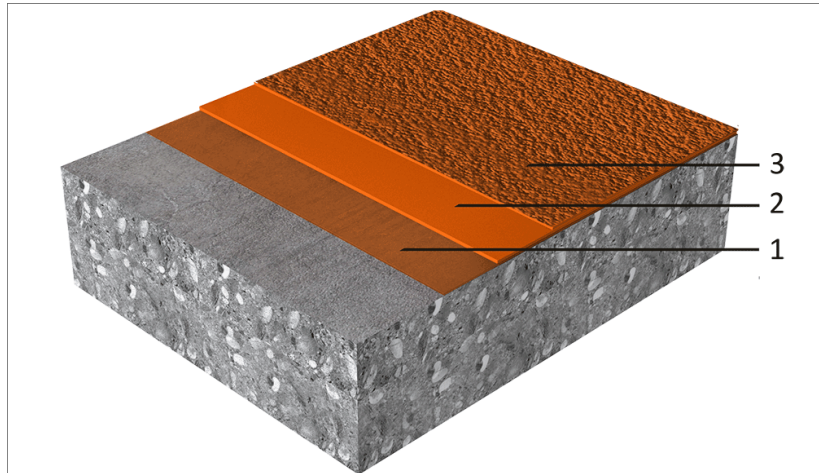

Layer	Product
1. Primer	Sikafloor®-156/-161 + Aggregate broadcast 0.3–0.8 mm
2. Wearing layer	Sikafloor®-376 + Aggregate broadcast 0.3–0.8 mm
3. Seal / top coat	Sikafloor®-378

Composition	Polyurethane, epoxy
Appearance	Textured, slip resistant, glossy finish
Colour	Available colours: ~RAL 7023, 7030, 7032, 7035, 7037, 7038, 7040, 7042, 9002, 9010 Other colour shades on request.
Nominal Thickness	~5 mm

TECHNICAL INFORMATION

Shore A Hardness	~60 (14 days/+23 °C)	(DIN 53505)
Abrasion Resistance	~1780 mg (H 22/1000/1000)	(DIN EN ISO 5470-1:1999)
Resistance to Wearing	AR 0.5	(DIN EN 13813)
Resistance to Impact	Class I	(ISO 6272)
Tensile Adhesion Strength	> 1.5 N/mm	(EN 1542)
Crack Bridging Ability	Class B3,2 (-20 °C)	(EN 1062-7)
Reaction to Fire	Bfl-s1	(EN 13501-1)
Chemical Resistance	Sikafloor® MultiFlex PB-56 always has to be sealed with Sikafloor®-378. Refer to the chemical resistance of Sikafloor®-378.	
Permeability to Water Vapour	Class III	(EN ISO 7783-1)
Capillary Absorption	$w < 0.01 \text{ kg}/(\text{m}^2 \times \text{h}^{0.5})$	(EN 1062-3)
Permeability to CO2	$S_d \geq 50 \text{ m}$	(EN 1062-6)
Skid / Slip Resistance	Class III	(EN 13036-4)

APPLICATION INFORMATION

Consumption

Layer	Product	Consumption
1. Primer	Sikafloor®-156/-161 + Aggregate broadcast 0.3–0.8 mm	~0.4 kg/m ² /layer ~1.0 kg/m ²
2. Wearing layer	Sikafloor®-376 (filled with 1:0.2 with quartz sand 0.06–0.3 mm) + Aggregate broadcast 0.3–0.8 mm	~2.1 kg/m ² (resin) + ~0.42 kg/m ² (quartz sand) ¹⁾ ~6.0–8.0 kg/m ²
3. Seal / top coat	Sikafloor®-378	~0.7–0.9 kg/m ² /layer

¹⁾ Rz = 0.0; Rz=0.5 ~2.45 kg/m² (resin) + ~0.49 kg/m² (quartz sand); Rz=1.0 ~2.75 kg/m² (resin) + ~0.55 kg/m² (quartz sand); Rz-roughness depth; +23 °C

These figures are theoretical and do not allow for any additional material due to surface porosity, surface profile, variations in level or wastage etc.

Product Temperature +10 °C min. / +30 °C max.

Ambient Air Temperature +10 °C min. / +30 °C max.

Relative Air Humidity 80 % max.

Dew Point The substrate and uncured floor products must be at least +3 °C above dew point to reduce the risk of condensation or surface damage of the floor finish.

Substrate Temperature +10 °C min. / +30 °C max.

Substrate Moisture Content ≤4 % parts by weight
Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).

Applied Product Ready for Use

Temperature	Foot traffic	Light traffic	Full cure
+10 °C	~24 hours	~3 days	~7 days
+20 °C	~12 hours	~2 days	~5 days
+30 °C	~5 hours	~1 day	~4 days

Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.

PRODUCT INFORMATION

Packaging Refer to the individual Product Data Sheets

Shelf Life Refer to the individual Product Data Sheets

Storage Conditions Refer to the individual Product Data Sheets

MAINTENANCE

CLEANING

Refer to Sika® Information Manual: Sikafloor®-Cleaning Regime

FURTHER DOCUMENTS

- Sika® Information Manual: Sikafloor®-Cleaning Regime
- Sika® Information Manual: Mixing & Applications of Flooring Systems
- Sika® Information Manual: Evaluation and Preparation of Surfaces for Flooring Systems

- Individual Product Data Sheets within the flooring system

LIMITATIONS

- Freshly applied Sikafloor® products must be protected from damp, condensation and water for at least 24 hours.
- Uncured material reacts in contact with water (foaming).
- During application care must be taken that no sweat drops onto the fresh Sikafloor® products. Wear head and wrist bands.
- For exact colour matching, ensure the Sikafloor® product in each area is applied from the same control batch numbers.
- If temporary heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO₂ and H₂O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

VALUE BASE

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA IRELAND LIMITED

Ballymun Industrial Estate
Ballymun
Dublin 11, Ireland
Tel: +353 1 862 0709
Web: www.sika.ie
Twitter: @Sikalreland



System Data Sheet
Sikafloor® MultiFlex PB-56
November 2019, Version 01.01
02081290000000056

SikafloorMultiFlexPB-56-en-IE-(11-2019)-1-1.pdf

