

SYSTEM DATA SHEET

Sikafloor® MultiFlex PB-55

POLYURETHANE ELASTIC MEMBRANE CAR PARK DECKING SYSTEM

PRODUCT DESCRIPTION

Sikafloor® MultiFlex PB-55 is a polyurethane, coloured, elastic membrane, crack-bridging, slip-resistant car park decking system and is part of the Sikafloor® Multiflex flooring range. It provides a hard wearing, seamless, chemical resistant, low maintenance, slip resistant finish when broadcast with different aggregate grades and sealed with a gloss finish seal coat. Thickness ~6,0 mm. Internal use.

USES

Sikafloor® MultiFlex PB-55 installation works to be carried out only by Sika Approved Contractors. Please observe information given by Product Data Sheets.

For car park decks:

- Non UV exposed
- Intermediate
- Turning areas

CHARACTERISTICS / ADVANTAGES

- Waterproof
- High mechanical resistance
- Good chemical resistance
- Good abrasion resistance
- Textured gloss finish
- Low dirt pick up
- Easy cleanability
- Seamless
- Slip and skid resistant surface
- Scratch resistant surface
- Easy application
- Low maintenance

ENVIRONMENTAL INFORMATION


- Conformity with LEED v2009 IEQc 4.2: Low-Emitting Materials - Paints and Coatings - Sikafloor®-376, Sikafloor®-377

APPROVALS / STANDARDS

- Fire testing EN 13501-1, Sikafloor® Multiflex PB-55, Hoch, Report No. KB-Hoch-180026
- Surface Protection System EN 1504-2, Sikafloor® Multiflex PB-55, QDB, Certificate No. P 10777-1
- CE Marking and Declaration of Performance to EN 1504-2 - Surface protection product for concrete - Coating - Sikafloor®-156, Sikafloor®-160, Sikafloor®-161, Sikafloor®-376, Sikafloor®-378
- Coating system DAfStb Test Class OS 11, Sikafloor® MultiFlex PB-55, kiwa, Test report No. P 10777-1
- Wear resistance EN 13892-4, Sikafloor® Multiflex PB-55, kiwa, Report No. P 10777-4

SYSTEM INFORMATION

System Structure

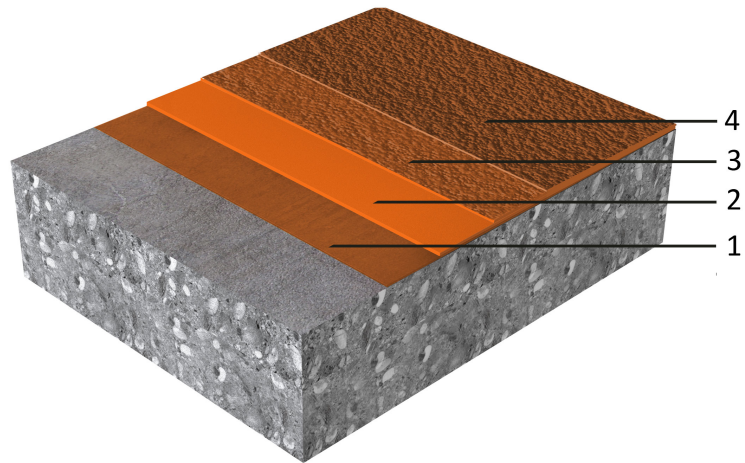

Layer	Product
1. Primer	Sikafloor®-156/-160/-161 + Aggregate broadcast 0,4–0,8 mm
2. Membrane	Sikafloor®-376
3. Wearing layer	Sikafloor®-377 (filled 1:0,4 with quartz sand 0,1–0,3 mm) + Aggregate broadcast 0,7–1,2 mm
4. Seal / top coat	Sikafloor®-378

Composition	Polyurethane, epoxy
Appearance	Textured, slip resistant, glossy finish
Colour	Available colours: ~RAL 7023, 7030, 7032, 7035, 7037, 7038, 7040, 7042, 9002, 9010 Other colour shades on request.

TECHNICAL INFORMATION

Shore D Hardness	~60 (14 days/+23 °C)	(DIN 53505)
Abrasion Resistance	2415 mg (H 22/1000/1000)	(DIN EN ISO 5470-1:1999)
Resistance to Wearing	AR 0,5	(DIN EN 13813)
Resistance to Impact	Class I	(ISO 6272)
Tensile Strength	~11 N/mm ²	(EN 53504)
Tensile Adhesion Strength	> 1.5 N/mm	(EN 1542)
Crack Bridging Ability	Class B 3,2 (-20 °C)	(EN 1062-7)
Reaction to Fire	Bfl-s1	(EN 13501-1)
Chemical Resistance	Sikafloor®-378 provides the chemical resistance. Refer to Product Data Sheet.	
Permeability to Water Vapour	Class III	(EN ISO 7783-1)
Capillary Absorption	w < 0,01 kg/(m ² ·h ^{0,5})	(EN 1062-3)
Skid / Slip Resistance	R11/V4	(DIN 51130)

APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	1. Primer	Sikafloor®-156/-160/-161 + Aggregate broadcast 0,4–0,8 mm	~0,4 kg/m ² /layer ~1,0 kg/m ²
	2. Membrane	ESikafloor®-376	~1,9 kg/m ²
	3. Wearing layer	Sikafloor®-377 (filled 1:0.4 with quartz sand 0,1–0,3 mm) + Aggregate broadcast 0,4–0,8 mm	~2,4 kg/m ² ~6,0–8,0 kg/m ²
	4. Seal / top coat	Sikafloor®-378	~0,7 kg/m ² /layer
Product Temperature	+10 °C min. / +30 °C max.		
Ambient Air Temperature	+10 °C min. / +30 °C max.		
Relative Air Humidity	80 % max.		
Dew Point	The substrate and uncured floor products must be at least +3 °C above dew point to reduce the risk of condensation or surface damage of the floor finish.		
Substrate Temperature	+10 °C min. / +30 °C max.		
Substrate Moisture Content	≤4 % parts by weight Test method: Sika®-Tramex meter, CM - measurement or Oven-dry-method. No rising moisture according to ASTM (Polyethylene-sheet).		
Applied Product Ready for Use	Temperature	Foot traffic	Light traffic
	+10 °C	~72 hours	~6 days
	+20 °C	~24 hours	~4 days
	+30 °C	~18 hours	~2 days
	Times are approximate and will be affected by changing ambient conditions particularly temperature and relative humidity.		

PRODUCT INFORMATION

Packaging	Refer to the individual Product Data Sheets
Shelf Life	Refer to the individual Product Data Sheets
Storage Conditions	Refer to the individual Product Data Sheets

MAINTENANCE

CLEANING

Refer to Sika® Method Statement: Sikafloor®-Cleaning Regime

FURTHER DOCUMENTS

- Sika® Method Statement: Sikafloor®-Cleaning Regime
- Sika® Method Statement: Mixing & Applications of Flooring Systems
- Sika® Method Statement: Evaluation and Preparation of Surfaces for Flooring Systems

- Individual Product Data Sheets within the flooring system

LIMITATIONS

- Freshly applied Sikafloor® products must be protected from damp, condensation and water for at least 24 hours.
- Uncured material reacts in contact with water (foaming).
- During application care must be taken that no sweat drops onto the fresh Sikafloor® products. Wear head and wrist bands.
- For exact colour matching, ensure the Sikafloor® product in each area is applied from the same control batch numbers.
- If temporary heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO₂ and H₂O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

VALUE BASE

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

ECOLOGY, HEALTH AND SAFETY

Local safety regulations must be observed and it advisable to wear PPI when working with this product with particular attention paid to cutting and handling. Transportation Class: The product is not classified as hazardous good for transport. Disposal: The material is recyclable. Disposal must be according to local regulations. Please contact your local Sika sales organisation for more information.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA IRELAND LIMITED

Ballymun Industrial Estate
Ballymun
Dublin 11, Ireland
Tel: +353 1 862 0709
Web: www.sika.ie
Twitter: @Sikalreland



System Data Sheet
Sikafloor® MultiFlex PB-55
November 2019, Version 01.01
02081290000000058

SikafloorMultiFlexPB-55-en-IE-(11-2019)-1-1.pdf

