



PRODUCT FOCUS

LANDSCAPING

SIKA® FASTFIX

ALL WEATHER

ALWAYS STRAIGHT

TO THE POINT

AVAILABLE IN
2 COLOURS



UNIQUE FORMULA
CONTAINING **ACTIVE
RESIN TECHNOLOGY**
FOR ADVANCED
DURABILITY



FOR ALL JOINTS FROM
JUST 20MM DEEP



EASY TO APPLY
- FAST TO SET



ACTS AS A NATURAL BARRIER
FOR WEED GROWTH



NO WASTE - STORE AND
REUSE ONCE OPENED



DARK BUFF



DEEP GREY

Colour swatches are a guide only and may vary.

Sika® FastFix All Weather
Paving Jointing Compound

SGAN	SIZE	COLOUR	BOX QTY	BARCODE
562467	14KG	DEEP GREY	1	5055492703637
562468	15KG	DARK BUFF	1	5055492703644

Sika® FastFix All Weather is a self-setting paving jointing compound that provides the ideal solution to perfect pointing on paving, paths and patios.

With a unique formula containing Active Resin Technology for advanced durability it is ready to use with no mixing required, easy to apply in all weather conditions; even in the rain and won't shrink or crack over time.

Suitable for use on all joints from just 20mm deep, Sika® FastFix can be used for a range of applications including footpaths, stone setts, cobbles and Indian sandstone paving slabs. Once opened it can be stored in water and reused to reduce waste.

Sika® Setting Sand
Narrow Paving Joint Filler

SGAN	SIZE	COLOUR	BOX QTY	BARCODE
442722	20KG	BUFF	1	5055492700223

A easy to use, moisture curing jointing compound for narrow joints. Sika® Setting Sand can be simply poured or swept into joints before being saturated with water. Provides perfect pointing for all types of block paving; once cured, it will not wash out, shrink or crack over time.



STAGE 1



STAGE 2



STAGE 3



SIKACERAM® FLOWFIX



SikaCeram® FlowFix is a high performance porcelain paving installation system, consisting of a bonding primer and jointing compound.

SikaCeram® FlowFix Bonding Primer is used to provide an exceptional bond between porcelain paving and the bedding mortar. Mixed solely with water, SikaCeram® FlowFix Bonding Primer is applied with a brush or roller to the rear of the paving when laying, to prevent the paving system breaking away from the mortar bed.

SikaCeram® FlowFix Jointing Compound is a controlled, cementitious flowable jointing grout which is applied by mixing with water on site. Once dry the surplus is simply washed off.



SikaCeram®-62 FlowFix Bonding Primer

SCAN	SIZE	COLOUR	BOX QTY	BARCODE
633196	20KG	GREY	1	5055492703286

A high strength primer that's used to provide an exceptional bond between porcelain paving and bedding mortar. It's fast and easy to mix, applied by brush or roller to the underside of paving and fully cures in 72 hours.



SikaCeram®-621 FlowFix Jointing Compound

SCAN	SIZE	COLOUR	BOX QTY	BARCODE
711447	15KG	IVORY	1	36 5055492703972
711500	15KG	BUFF	1	36 5055492703996
711448	15KG	LIGHT GREY	1	36 5055492703965
711449	15KG	DARK GREY	1	36 5055492703989

A controlled, flowable porcelain grout, that's simply poured and squeezed into paving joints, for a fast and effective application. Suitable for joints between 3-10mm wide and 20mm in depth, SikaCeram® FlowFix Jointing Compound cures in 60 minutes to a non-permeable finish.*



* Depending on site conditions
Colour swatches are a guide only and may vary.

HOW TO APPLY

Bonding Primer



STAGE 1



Following the instructions, add water to the high strength SikaCeram® FlowFix Bonding Primer.

STAGE 2



Mix the primer in a tub until a smooth paste forms.

STAGE 3



Apply with a brush to the underside of the porcelain flags.

STAGE 4



Immediately after applying the primer, lay the paving flag onto the mortar bed.

STAGE 5



Tap down using a rubber mallet and check flag is level. Cure for up to 72 hours.

Jointing Compound



Following the instructions, prepare your substrate. Pre-wet the tiles but ensure there is no standing water.

STAGE 6



Mix SikaCeram® FlowFix Jointing Compound with water using the measurements given in the instructions.

STAGE 7



Using an electric mixer, mix until a smooth liquid forms. CAUTION: Adding too much water will cause the mixture to split and make it unusable.

STAGE 8



Once mixed correctly, pour the compound into the joints. Pour within 15 minutes of mixing.

STAGE 9



Use a squeegee to guide the jointing compound into exposed joints to obtain fill level.

STAGE 10



Ensure the product has sufficiently hardened before cleaning the surface of the flags with a sponge and bucket. Leave to cure for a further 60 minutes.

PAVING AND SURFACE SEALERS

Paving can be expensive and a big investment but can quickly be ruined by spillages, weathering, staining and other day to day activities.

The most popular types of paving are natural stone, block paving and concrete, all of which are porous and prone to staining and weathering.

To prevent imperfections, paving needs to be sealed using an appropriate sealer for the paving type. This will protect and keep the paving in the best condition.

Sika® Stone Protector

Water-based treatment for protecting natural stone

SGAN	SIZE	COLOUR	QTY	BARCODE
410465	5LTR	CLEAR	4	5055047210993

A water-based sealer which is suitable for all forms of porous stone. Once applied to a surface, Sika® Stone Protector resists stains without changing the aesthetic look of the surface it is applied to.




Sika® Path & Patio Sealer

For sealing and protecting patios, paving and stonework

SGAN	SIZE	COLOUR	QTY	BARCODE
880086	5LTR	CLEAR	4	5055047206354

A low-odour, water-based, acrylic coating that is ideal for sealing and protecting patios, paths, natural stone, concrete and block paving. Sika® Patio Seal protects against the effects of water, petrol and organic growth. The product dries to a hard-wearing, water repellent film which gives a low sheen slip-resistant finish.

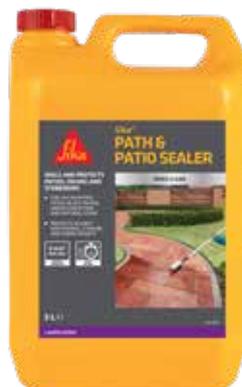

Sikagard 700 S

Siloxane Based Water Repellent Impregnation Class I

SGAN	SIZE	COLOUR	BOX QTY	BARCODE
100861	5LTR	CLEAR	1	5604672000211
100862	25LTR	CLEAR	1	5604672000365

A one part solvent based water repellent impregnation for absorbent cementitious substrates. It penetrates well into the open pores of the substrate, providing durable water repellency, while still allowing water vapour diffusion in both directions.




SURFACE TREATMENTS

Sika® Mould Buster Mould and Algae Treatment

SGAN	SIZE	COLOUR	QTY	BARCODE
174996	5LTR	-	4	5055047209096

A powerful, fast acting solution which is effective on most surfaces. Sika® Mould Buster removes algae, mould and green growth without the need for scrubbing or pressure washing.



Sika® Brick and Patio Cleaner Cleaning Solution for Brickwork and Patios

SGAN	SIZE	COLOUR	QTY	BARCODE
102476	5LTR	-	4	5055047200581


A fast acting, acid based cleaning solution for brickwork, concrete and paving. Sika® Brick and Patio Cleaner contains a powerful formula that dissolves mortar and cement stains, ingrained dirt, efflorescence on mineral surfaces.



Sika® Stabilising Solution

SGAN	SIZE	COLOUR	QTY	BARCODE
879950	5L	-	4	5029347601508

A microscopically fine polymer emulsion which penetrates dusty/chalky and badly weathered surfaces to leave a stable sound base for decoration with paint, wallpaper, tiling etc. Suitable for both interior and exterior use.



Sika® Tarmac Restorer High Performance Surface Coating

SGAN	SIZE	COLOUR	QTY	BARCODE
879951	5LTR	BLACK	4	5029347612856

A high performance surface coating specially formulated to make tired old tarmac look just like new. Tarmac Restorer provides a tough, durable, low sheen finish which protects from weathering, oil and petrol spills and unsightly plant and weed growth. Tarmac restorer is easy to apply, provides long term protection, reduces further tarmac repair needs and restores the deep, black finish of your tarmac. As it is quick drying, driveways can be used after only 4 hours of the product being applied.




Sika® Dustproofer & Concrete Hardener

For strengthening weak or porous concrete

SGAN	SIZE	COLOUR	QTY	BARCODE
879841	5LTR	-	4	5029347004354

A economic, ready to use dustproofer and concrete surface hardener for concrete floors, paths and driveways. Sika® Dustproofer is suitable for hardening and dustproofing both old and new concrete.




Sika® Water Sealer

High performance water repellent for walls

SGAN	SIZE	COLOUR	QTY	BARCODE
880435	5LTR	CLEAR	4	5055047210986

A solvent free water repellent and protector for concrete, brick, stone and masonry which protects against rainwater penetration without changing the aesthetic appearance of the substrate.



ACE THAT SPACE

SIKA IRELAND LIMITED

Sika House
Ballymun Industrial Estate
Dublin 11
D11 DA2V
Ireland

Contact

Phone +353 1 862 0709
Fax +353 1 862 0707
E-Mail info@ie.sika.com
www.sika.ie
X@Sikalreland

BUILDING TRUST

