

PRODUCT DATA SHEET

Sika® Ucrete® TZAS

(formerly Ucrete® TZAS)

Antistatic, smooth, heavy-duty polyurethane terrazzo floor screed

PRODUCT DESCRIPTION

Sika® Ucrete® TZAS is a smooth, polyurethane, conductive, heavy-duty terrazzo floor with a decorative aesthetic for ESD and ECF environments. It has very good resistance to aggressive chemicals, heavy abrasion and temperatures to +150 °C.

USES

Sika® Ucrete® TZAS is used as a wearing layer screed for Sika® Ucrete® flooring systems. Sika® Ucrete® TZAS is used within dry process areas including the following application areas:

- Pharmaceutical facilities
- Chemical and processing facilities
- Clean rooms
- Warehouses
- Defence estates
- Electronic facilities and data centres

Please note:

- The Product may only be used by experienced professionals.

CHARACTERISTICS / ADVANTAGES

- Expert installation by fully trained and licensed applicators
- Suitable for application on to 7-day-old concrete and 3-day-old polymer screed
- Resistant to bacterial or mould growth
- Electrostatically conductive
- Seamless and hygienic
- Easy to clean and maintain
- Non-tainting from the end of mixing
- Good resistance to abrasion
- Good resistance to specific chemicals
- Good temperature resistance
- Low VOC emissions
- Tolerant to substrates with high moisture content

APPROVALS / STANDARDS

- Halal Certification Europe (HCE), Sika® Ucrete®, WHFC, Certificate No. 21453-2/1/1/Y1
- Food and Beverage Facilities Suitability, Sika® Ucrete®, HACCP, Test Report No. I-PE-769-SA-2-RG-06b
- Indoor Air Comfort Gold EN 16516, Sika® Ucrete®, eurofins, Certificate No. IACG-321-01-01-2023

PRODUCT INFORMATION

Chemical Base	Water-based polyurethane cement hybrid
Packaging	Refer to the current price list for available packaging variations.
Shelf Life	Always refer to the best-before date of the individual packaging.
Storage Conditions	The Product must be stored in original, unopened and undamaged sealed packaging in dry conditions at temperatures between +5 °C and +30 °C. Always refer to the packaging. Refer to the current Safety Data Sheet for information on safe handling and storage.

Colour	Cured colour	Red, Orange, Yellow, Bright Yellow, Cream, Grey, Light Grey, Green, Light Green, Green/ Brown, Blue.
--------	--------------	--

Density	Mixed Product	~2.09 kg/l	(EN ISO 2811-1)
---------	---------------	------------	-----------------

TECHNICAL INFORMATION

Compressive Strength	Cured 28 days at +23 °C	55 N/mm ²	(EN 13892-2)
----------------------	-------------------------	----------------------	--------------

Modulus of Elasticity in Compression	3250 MPa		(BS 6319-6)
--------------------------------------	----------	--	-------------

Flexural Strength	Cured 28 days at +23 °C	14 N/mm ²	(EN 13892-2)
-------------------	-------------------------	----------------------	--------------

Tensile Strength	Cured for 28 days at +20 °C	6 MPa	(BS 6319-7)
------------------	-----------------------------	-------	-------------

Tensile adhesion strength	> 2.0 N/mm ² (concrete failure)		(EN 1542)
---------------------------	--	--	-----------

Coefficient of Thermal Expansion	2.4 × 10 ⁻⁵ °C ⁻¹		(ASTM C531)
----------------------------------	---	--	-------------

Skid / Slip Resistance	PTV, slider 96	35–40 wet conditions (without top coat)	(EN 13036-4)
------------------------	----------------	---	--------------

Electrostatic Behaviour	Resistance to ground	$R_G < 1 \times 10^6 \Omega$	(EN 1081)
-------------------------	----------------------	------------------------------	-----------

Resistance to ground	$R_G < 1 \times 10^6 \Omega$	(IEC 61340-4-1)
----------------------	------------------------------	-----------------

Resistance of person to earth	< 35 MΩ	(IEC 61340-4-5)
-------------------------------	---------	-----------------

Body voltage generation	< 50 V	(IEC 61340-4-5)
-------------------------	--------	-----------------

Note: Measurement results can be affected by ESD clothing, ambient conditions, measurement equipment, cleanliness of the floor and the test personnel.


Service Temperature	Thickness	Minimum	Maximum	Occasional spillage
	9 mm	-40 °C	+120 °C	-
	12 mm	-40 °C	+130 °C	+150 °C

Chemical Resistance	Laboratory-defined resistance to many individual chemicals. Before proceeding, contact Sika Technical Service for specific information.
---------------------	---

Reaction to Fire	Class B _{fl} -s1	(EN 13501-1)
------------------	---------------------------	--------------

SYSTEM INFORMATION

System Structure

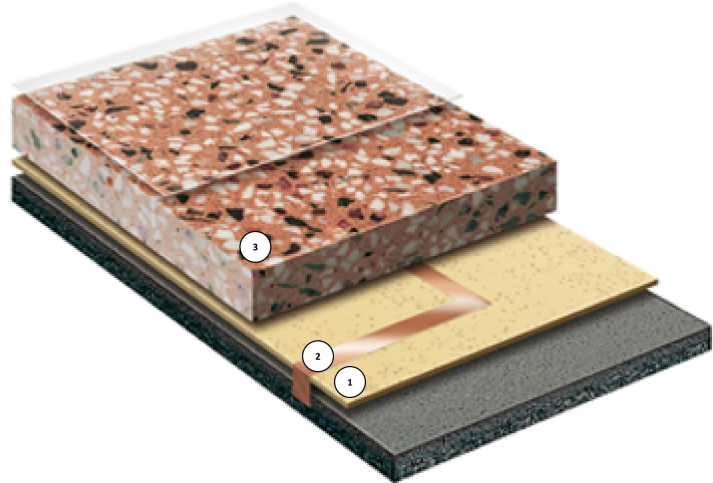

Layer	Product
1. Primer	Sika® Ucrete® PSC
2. Earthing connection	Copper tape
3. Wearing layer	Sika® Ucrete® TZAS

APPLICATION INFORMATION

Consumption	Layer	Product	Consumption
	Primer	Sika® Ucrete® PSC	0.2–0.4 kg/m ²
	Earthing connection	Copper tape	Maximum distance 10 m between strips
	Wearing layer	Sika® Ucrete® TZAS	20–22 kg/m ² for 9 mm 26–27 kg/m ² for 12 mm

Note: Consumption data is theoretical and does not allow for any additional material due to surface porosity, surface profile, variations in level, wastage or any other variations. Apply the Product to a test area to calculate the exact consumption for the specific substrate conditions and proposed application equipment.

Layer Thickness	~9–12 mm	
Product Temperature	Maximum	+30 °C
	Minimum	+15 °C
Ambient Air Temperature	Maximum	+35 °C
	Minimum	+10 °C
Substrate Temperature	Maximum	+30 °C
	Minimum	+10 °C
Curing Time	Substrate temperature	Return to traffic
	+8 °C	16–24 hours
	+10 °C	4 hours (with Sika® Ucrete® Accelerator)

Note: Times are approximate and will be affected by changing ambient and substrate conditions.

VALUE BASE

All technical data stated in this Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

FURTHER DOCUMENTS

Select from the following specification clauses as required:

- A 9 mm Sika® Ucrete® TZAS floor is fully resistant to high temperature spillage and discharge up to +120 °C and is fully steam-cleanable. Suitable for freezer temperatures down to -40 °C.
- A 12 mm Sika® Ucrete® TZAS floor is fully resistant to high temperature spillage and discharge up to +130 °C and occasional spillage up to +150 °C and is fully steam-cleanable. Suitable for freezer temperatures down to -40 °C

ECOLOGY, HEALTH AND SAFETY

Local safety regulations must be observed and it advisable to wear PPI when working with this product with particular attention paid to cutting and handling. Transportation Class: The product is not classified as hazardous good for transport. Disposal: The material is recyclable. Disposal must be according to local regulations. Please contact your local Sika sales organisation for more information.

Regulation (EC) No 1907/2006 (REACH) - Mandatory training

As from 24 August 2023 adequate training is required before industrial or professional use of this product. For more information and a link to the training visit <https://irl.sika.com/en/knowledge-hub-sika-ireland/pu-training.html>.



APPLICATION INSTRUCTIONS

SUBSTRATE PREPARATION

IMPORTANT

Reduced service life due to incorrect treatment of cracks

The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.

1. For static cracks, ensure the width is suitable for overcoating with Sika® Ucrete® TZAS.
2. For dynamic cracks, ensure the movement is within the movement capacity of Sika® Ucrete® TZAS.

TREATMENT OF JOINTS AND CRACKS

Construction joints and existing static surface cracks in substrate require pre-treating before full layer application. Use Sikadur® or Sikafloor® resins.

The Product can be applied on green or damp concrete with no standing water. Allow for at least 3 days for early concrete shrinkage to occur to prevent shrinkage cracks from appearing on the wearing surface.

Cementitious substrates must be structurally sound and of sufficient compressive strength (minimum 30 N/mm²) with a minimum tensile strength of 1.5 N/mm².

Substrates must be clean, dry and free of contaminants such as dirt, oil, grease, coatings, laitance, surface treatments and loose friable material.

APPLICATION

Application must be undertaken by a fully trained and licensed Sika® Ucrete® applicator.

LOCAL RESTRICTIONS

Note that as a result of specific local regulations the declared data and recommended uses for this product may vary from country to country. Consult the local Product Data Sheet for the exact product data and uses.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

SIKA IRELAND LIMITED

Ballymun Industrial Estate
Ballymun
Dublin 11, Ireland
Tel: +353 1 862 0709
Web: www.sika.ie
Twitter: @Sikalreland



Product Data Sheet

Sika® Ucrete® TZAS
August 2024, Version 01.01
02081400000002029

SikaUcreteTZAS-en-IE-(08-2024)-1-1.pdf

